

# Instruction For Universal Tension Safety Device



**WARNING:** It is imperative that the Tension Safety Device for bead chain/cord loop be properly secured to the wall or window frame to reduce a child's access to the bead chain/cord loop. Young children can wrap bead chain/cord loops around their necks and strangle. Always keep loops secured and out of the reach of children.


## Parts Included

---

One assembled Tension Safety Device (1)

Cover for Tension Safety Device (2)

Two 1 ½" #6 wood screws (3)

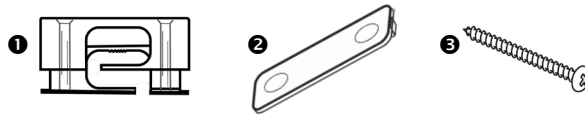

## Installation


---

Attach the tension device to the bead chain/cord by pressing the tension device springs halfway and sliding the chain/cord through the open channel.

Pull down the tension device with the chain/cord along the window frame in such a way that the chain/cord loop can move freely through the device.

Mark locations for screws on the window frame, pre-drill holes if needed and use a screwdriver to attach the tension device to the window frame. Use included #6 screws. Cover the screw with the tension device cover.

Ensure that the chain/cord is straight, tangle-free, and not too taut.

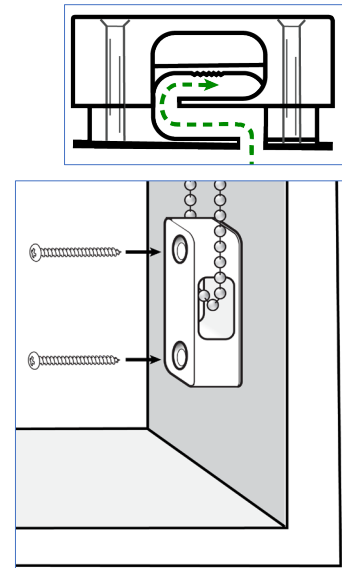

If you require additional parts or help with installation, call our Customer Care Team at 800-256-5005 or email us at [customer care@regaldrapes.com](mailto:customer care@regaldrapes.com).

