


# Rod Pocket & Flange Rod Pocket Drapery

## Installation Instructions

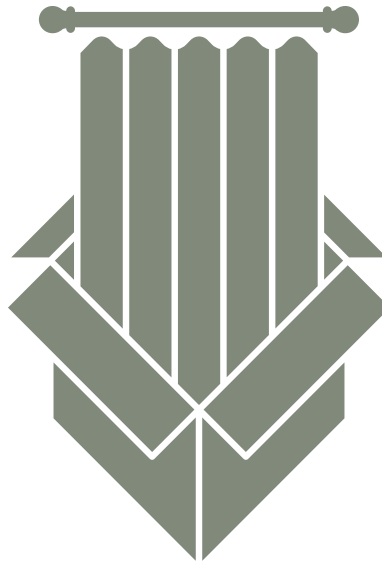

Let's get excited for your new drapes. Please take a few minutes to review these simple steps so your drapes will be hanging beautifully in no time.

## Before You Begin

Please note that:

- Rod Pocket drapes are not designed to be left or right sided and can be placed on either side of the rod.
- If your order includes hardware, it arrives in a separate package. Finish the hardware installation before attaching drapes but leave one finial detached to mount drapes on the rod.
- If you ordered tiebacks, an additional tenter hook will be included for each tieback. You will need a hammer, pencil and, a measuring tape to position and install the tenter hooks.

Please contact Customer Care at 1-800-256-5005 if you need assistance.

## Rod Pocket Drapery Installation Steps

### Step 1 – Unpacking Drapes

Unpack all drapes. Sort drapes for different windows if you have more than one window in your order.

### Step 2 – Rod Preparation

New drapery hardware installation: install new hardware following the hardware installation instructions. Leave one finial off and do not lock rod on the brackets.


Existing drapery hardware: - remove old drapes (if necessary), detach the drapery rod from the brackets and remove one of the finials.

### Step 3 – Mounting Drapes

Put your rod through the pocket on the top of the drape.

If your drape has a flange, it will have 2 pockets on the top of the drape. In this case use the second pocket from the top to insert the drapery rod.

Repeat this procedure with the second drape if you have a pair.

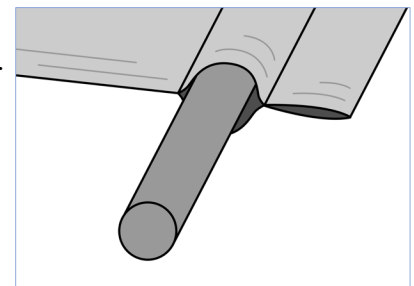


### Step 4 – Installing Rod

Once the drapes are in place, install the last finial and permanently attach and lock your rod according to the hardware installation instructions.

### Step 5 – Dressing Drapes

Make folds and space them out evenly to achieve the desired look.

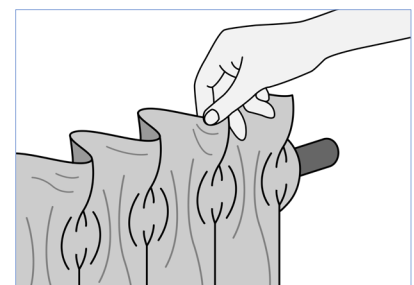

## Rod Pocket Drapery Installation Steps


(Cont'd)

### Step 6 – Tiebacks Installation (optional)

We recommend installing your tieback approximately halfway down the height of your drapes. Wrap the tieback around the drape and adjust the height up or down to find the perfect location.

When you find the perfect height for the tieback, mark the location where you need to set the tenter hook. Use a hammer to insert the tenter hook into the wall and hang the tieback.

Attach the second tenter hook on the other side at the same height if you have a pair.

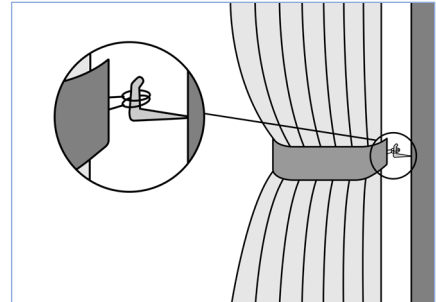

## Drapery Care

Once the draperies are installed and dressed, most wrinkles and folds will hang out on their own within 1 - 2 weeks.

A garment steamer may also be used to help smooth out the wrinkles. Please take care not to overheat the fabric while removing wrinkles. You also can use a wrinkle release spray like Downy® Wrinkle Releaser.

Certain fabrics like silks or linens have natural characteristics that steaming will not remove.

Please contact Customer Care at 800-256-5005 if you have additional questions on how to care for your drapes.



Thank you for choosing Regal Drapes. We are proud to make your drapes with careful attention to every detail. We hope you enjoy your drapes for many years to come.

The Regal Drapes Team